


METER-RITE®

Pole-Top Double-Throw Switch
Catalog Numbers **9221, 9422**
Single Phase, 240 Vac
NEMA 3R Rainproof Enclosure


CONNECTING INSTRUCTIONS

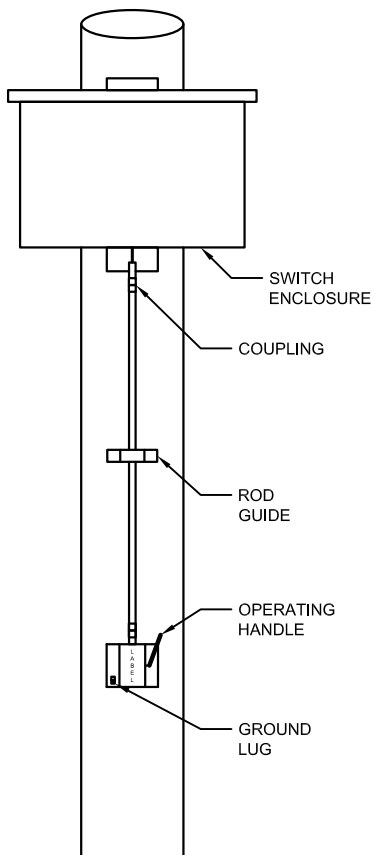

1. Make up a meter loop using 3/4" conduit of the proper length. This loop should consist of potential leads and current leads to the meter (2 each). The green current lead is also the ground lead to the meter. These leads should be of No. 14 AWG or larger and should not exceed 35 feet in length. The wiring diagram of Fig. A should be followed in making these connections.
2. Mount the switch near the top of the pole. The meter loop may be attached before this is accomplished.
3. 1/2" EMT is recommended for the connecting rod between the switch and the operating handle. Attach the desired length of EMT to the stub protruding from the bottom of switch enclosure, but do not attach handle assembly.
4. Pull on rod to operate switch to LINE position.
5. Note LINE - AUX position of handle. Place handle in LINE position and insert handle stub into coupling at bottom of rod without tightening the set screw. Orient handle assembly for alignment with rod with mounting holes against pole. Tighten set screw on coupling, locking handle assembly to rod. Fasten handle assembly to pole, locating its position on the pole with rod hanging freely against stops in switch enclosure.
6. Operate handle to make sure switch is functioning. Switch should snap open and closed as handle is operated. Ground handle and enclosure using ground lugs provided.
7. Fasten U shaped rod guide over operating rod about half way between handle and switch enclosure. Rod guide should depress rod slightly toward pole.
8. Incoming lines should be connected to LINE terminals. Load lines should be connected to LOAD terminals. Standby generator may be connected to AUX terminals.

Fig. A

5 Terminal Shorting-Type
Meter Socket

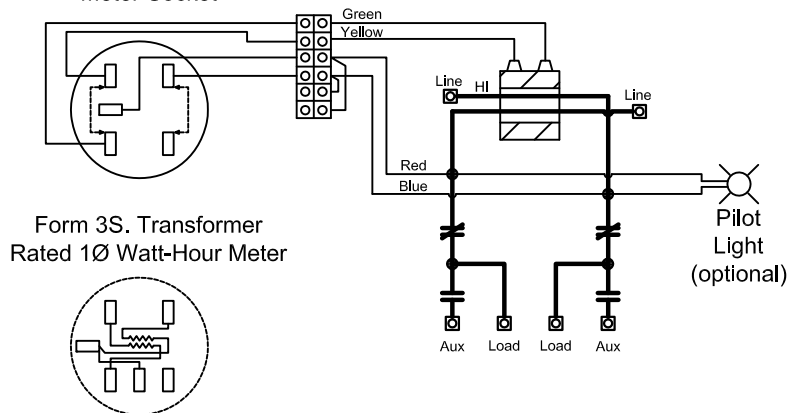

CATALOG NUMBER	AMPS	CT RATIO	WIRE RANGE
			LINE, LOAD AND AUX LUGS
9221	200	200:5	250 MCM - #6 CU-AL (1-HOLE LUG)
9422	400	400:5	(2) 250 MCM - 1/0 or (1) 600 MCM - #4 CU-AL (1-HOLE LUG)

USE COPPER OR ALUMINUM WIRE RATED 75° C. OXIDE INHIBITING COMPOUND IS RECOMMENDED FOR ALUMINUM WIRE.

WIRE BENDING SPACE IN THE ENCLOSURE BASED ON (2) 250 MCM, NOT (1) 600 MCM.

WARNING: ALL ADJUSTMENTS ON SWITCH HAVE BEEN MADE AT FACTORY AND MUST NOT BE CHANGED IN THE FIELD. IF SWITCH DOES NOT OPERATE PROPERLY CHECK THE HANDLE INSTALLATION ON POLE-TOP UNIT.

Schematic for Catalog Numbers
9221, 9422

RONK ELECTRICAL INDUSTRIES, INC.
NOKOMIS, ILLINOIS

Drawing Number

2-2927

Scale	None
Drawn	GMW
Date	12/05/2013
Approved	NCL

TIGHTENING TORQUE	
SOCKET SIZE (INCH)	TORQUE (IN-LB)
1/8	45
5/32	100
3/16	120
7/32	150
1/4	200
5/16	250
3/8	375
1/2	500
9/16	600

Revision Description
RE-DRAWN FOR CAD.

Rev	CN
Date	
BY	C