

NOTES

1. SERIES 16 CAM-LOCK (MALE)
2. PHASE ROTATION MONITOR (OPTIONAL)
3. AUX CONTACTS RATED 10A, 250VAC MAX (OPTIONAL)
4. SOURCE INDICATING LIGHTS (OPTIONAL)
5. MECHANICAL LUGS INCLUDED FOR UTILITY AND LOAD

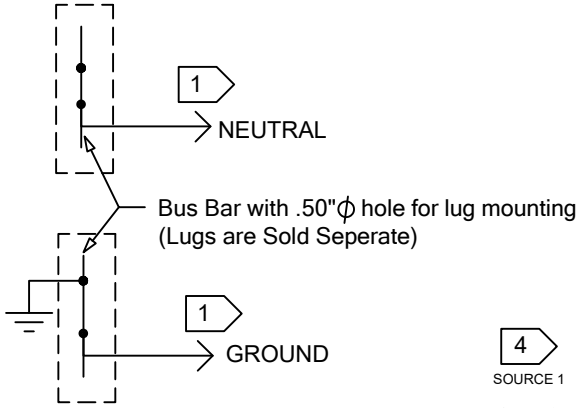

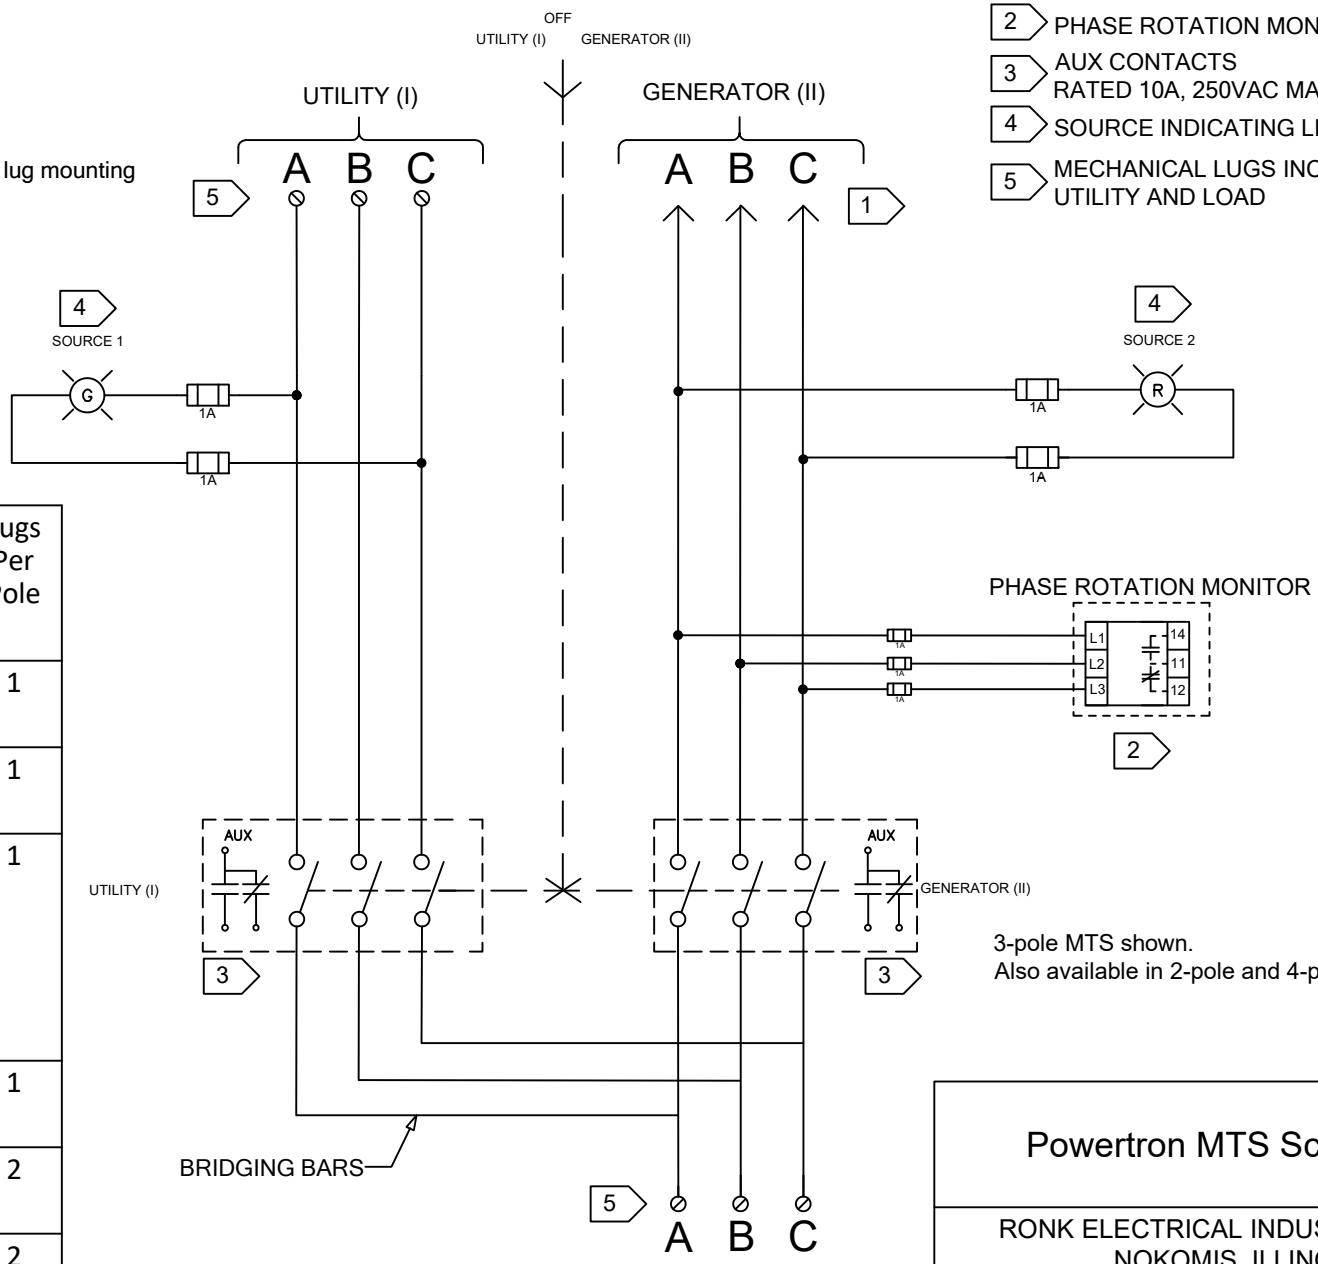

Amperage	Lug Connections (Utility and Load)	Wires Allowed per Lug	Lugs Per Pole
100	#6 – 300 MCM Cu/Al	1	1
200	#6 – 300 MCM Cu/Al	1	1
400	#4 – 600 MCM Cu/Al	1	1
	Or	or	
	1/0 - 250 MCM Cu/Al	2	
600	#2 - 600 MCM Cu/Al	2	1
800	#2 - 600 MCM Cu/Al	2	2
1200	#2 - 600 MCM Cu/Al	2	2

3-pole MTS shown.
Also available in 2-pole and 4-pole construction.

Powertron MTS Schematic

RONK ELECTRICAL INDUSTRIES, INC.
NOKOMIS, ILLINOIS

Scale	N/A
Drawn	gmw
Date	10/27/26
Approved	

Drawing Number

2-6715

Rev	CN	Revision Description
	Date	
	BY	