

RONK METERING CENTER

MSB320 METER SOCKET WITH CIRCUIT BREAKER



RONK's 320 Amp Meter Socket Circuit Breaker combo (MSB) units offer lightweight, easy, and straightforward installation. These units are suitable for use only as service equipment (SOUSE), feature a NEMA 3R aluminum enclosure, and are available in both 4 and 5 jaw lever bypass options.



FEATURES & BENEFITS

- NEMA 3R – lightweight and corrosion resistant with aluminum enclosure
- Factory breaker terminal load lugs
- Separate cover on meter socket section – built to meet the NEC code section 230.62
- UL67 Listed
- Manufactured in the USA

CIRCUIT BREAKER 320A SPECIFICATIONS

MSB320					
PART NUMBER	AMPERAGE RATING	BREAKER	BYPASS TYPE	LOAD LUG	KNOCKOUT PATTERN
MSB320LC-UG	(2) 200	25k	Talon - 4-Jaw Lever-Bypass Meter Socket	Factory Breaker Terminal Load Lugs (1 per Phase)	(2) 2-2.5", (1) 2.5-3"
MSB320LD-UG	(1) 100 & (1) 200	25k	Talon - 4-Jaw Lever-Bypass Meter Socket	Factory Breaker Terminal Load Lugs (1 per Phase)	(2) 2-2.5", (1) 2.5-3"
MSB320LE-UG	(2) 200	25k	Talon - 5-Jaw Lever 5th @ 9 o'clock position	Factory Breaker Terminal Load Lugs (1 per Phase)	(2) 2-2.5", (1) 2.5-3"
MSB320LF-UG	(1) 100 & (1) 200	25k	Talon - 5-Jaw Lever 5th @ 9 o'clock position	Factory Breaker Terminal Load Lugs (1 per Phase)	(2) 2-2.5", (1) 2.5-3"

* BEFORE INSTALLATION, CONSULT YOUR LOCAL UTILITY FOR APPROVAL

(Call Ronk for Specific Part Numbers)


* MULTIPLE BREAKER CONFIGURATIONS ARE AVAILABLE

* The CECHA approved unit is our MSB320LE-UG only; add 1 to this item code (Ex: MSB320LE1-UG)

* MEG Utility approved items, add "x4" to item code; Lever Bypass approved only (Ex: MSB320Lx4 (x= C, D, E, F)



Figure 1

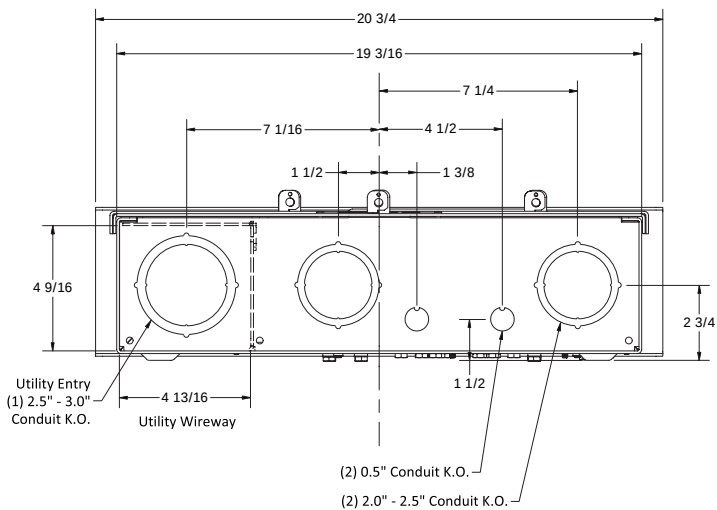

(IN INCHES)

Figure 2

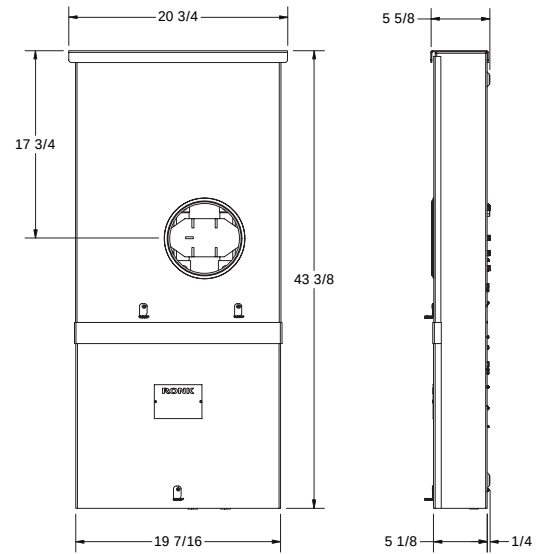


Figure 3

