

METER-RITE®

Grade-Level Meter Socket with Circuit Breaker Combo Unit

Catalog Number: MSB200L


TYPE 3R Rainproof Enclosure 240 Vac

Suitable Only for Use as Service Equipment

Short Circuit Current Rating Of This Panelboard Is 25,000 RMS Symmetrical Amperes, 240 VAC Max, But The Rating Is Limited To The Lowest Interrupting Rating Capacity At A Supply Voltage Of Any Breaker Installed. The Replacement Circuit Breakers Must Be Of The Same Type And Interrupt Ratings.

200 AMP 240 VOLT SINGLE-PHASE SERVICE LINE

Note: L = Lever Bypass

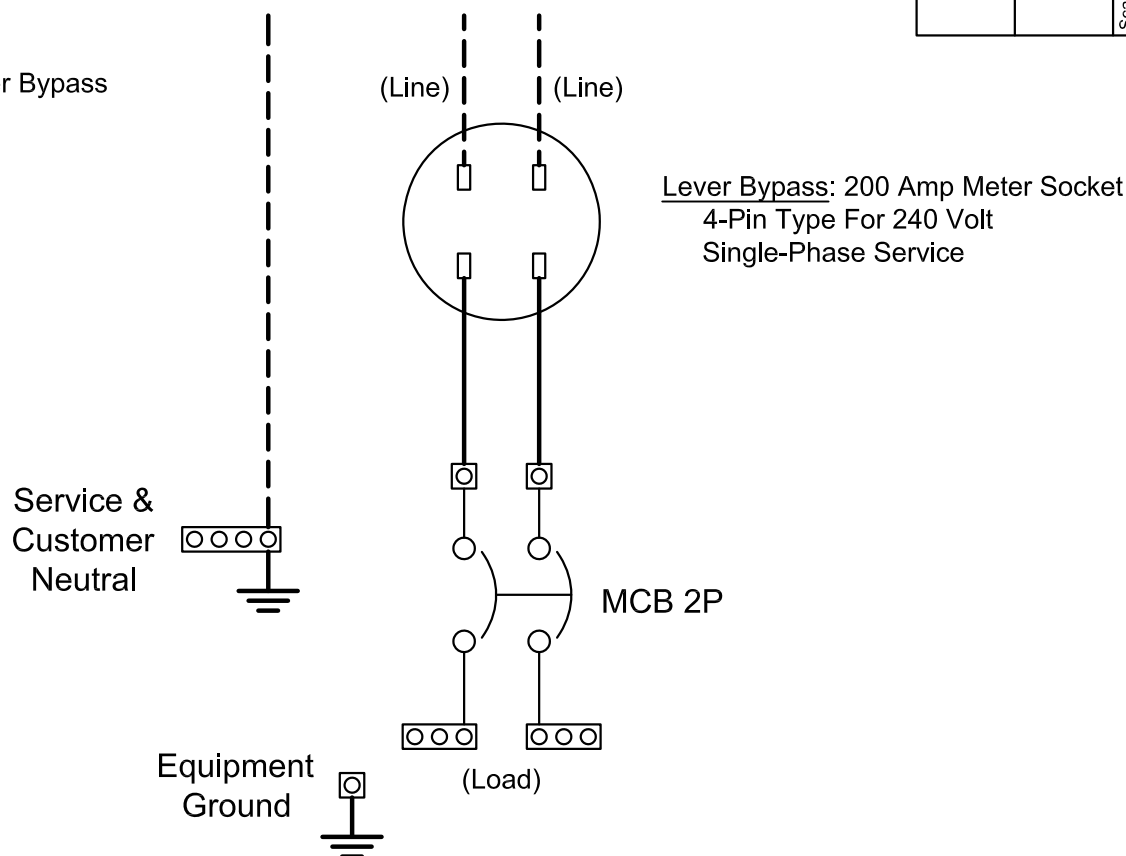

SWITCH CATALOG NUMBER	SERVICE			CUSTOMER	
	LINE LUGS	NEUTRAL		LOAD LUGS	
MSB200L	350 MCM - #6 (LAY IN TERMINAL)	350 MCM - #6 (4-HOLE BAR)		350 MCM - #6 (3-HOLE BAR)	

TIGHTENING TORQUE	
SOCKET SIZE (INCH)	TORQUE (IN-LB)
1/8	45
5/32	100
3/16	120
7/32	150
1/4	200
5/16	250
3/8	375
1/2	500
9/16	600

USE COPPER WIRE RATED 75° C FOR LOAD CONNECTIONS.

Schematic for Catalog Number
MSB200L

RONK ELECTRICAL INDUSTRIES, INC.
NOKOMIS, ILLINOIS

Drawing Number

2-5577

Scale None

Drawn NCL

Date 2/16/17

Approved NCL

Revision Description

Changed wording of SCCR.

Rev CN 0196

Date 02/22/19

BY NCL

C