

POWERTRON®

STANDARD SERIES


STANDARD SERIES, UL LISTED, DOCKING STATION 600 – 800 AMP

Part Number	Rating	SCCR Rating	Technical Data	Enclosure Option	Dimensions
TBQCS(X)06-LWMS(XXX)	600	22 kA RMS 600 VAC Max	3 Phase, 5 Wire, 208Y/120 VAC, 240/120 VAC, 480Y/277 VAC, or 600/347 VAC	Wall mount, mild steel or stainless steel	41.8"H x 32"W x 19.8"D
TBQCS(X)06-LWSS(XXX)					
TBQCS(X)08-LWMS(XXX)	800				
TBQCS(X)08-LWSS(XXX)					


- UL Listed NEMA 3R Enclosure
- Trapped cable door prevents cable disconnection by unauthorized personnel
- Tin plated copper bus bar for incoming utility power connection
- Completed assembly safety agency approved
 - cULus Listed 1008 / Control # 47HY / Product ID: Enclosed Power Inlet
 - cULus Listed 1773 / Control #XCKT / Product ID: Enclosed Power Outlet

(X) = male (M) or female (F) camlocks; ex: TBQCSM06
(XXX) = voltage being used; ex: LWMS480

TYPICAL ONE LINE DIAGRAM (INPUT AND OUTPUT PANELS)

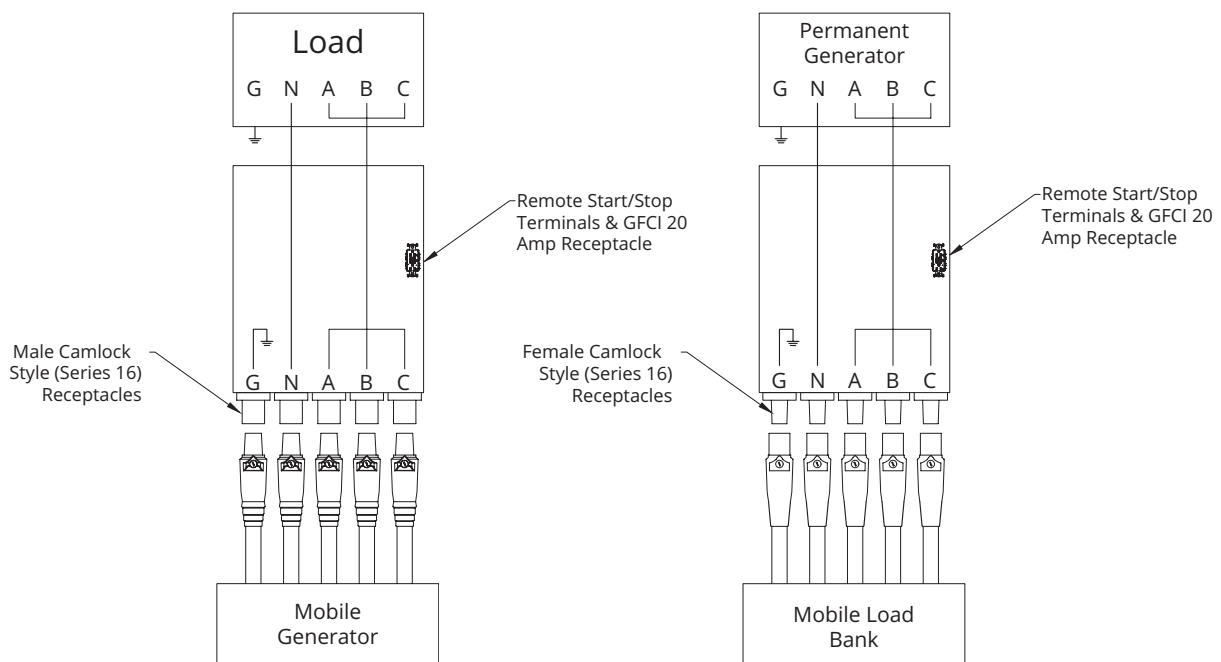

DIMENSIONS OF STANDARD SERIES 600-800 AMP

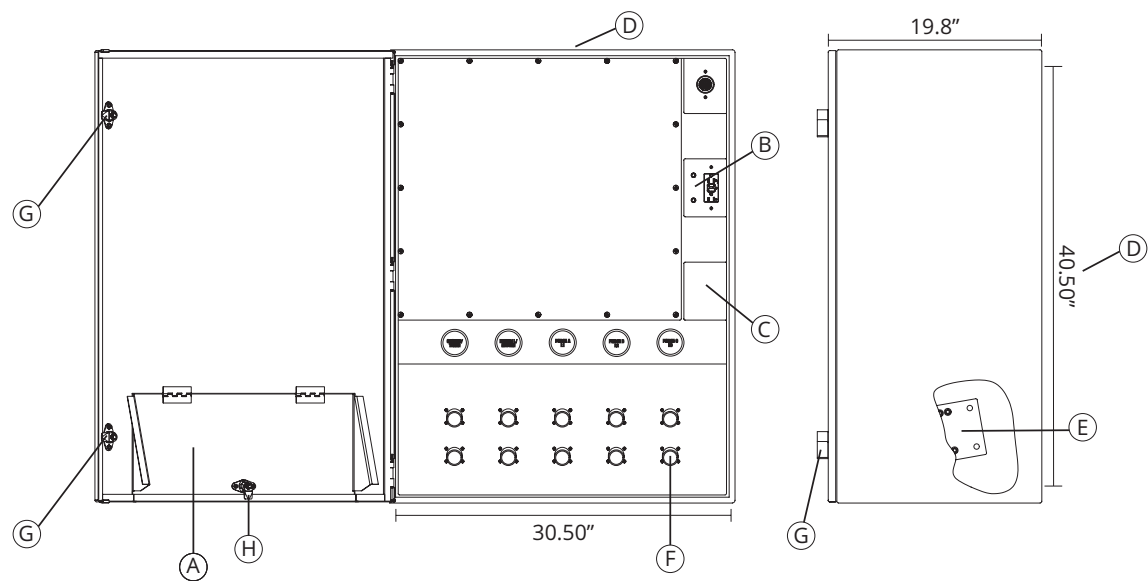

ENCLOSURE SPECIFICATIONS

Type	Height	Width	Depth	Material	Color/Finish
NEMA 3R	41.8"	32"	19.8"	Mild Steel	ANSI 61 Gray
				Stainless Steel	Clear Brushed Finish

ORDERING INFORMATION

Series		Camlock Type		Amperage		Enclosure Option		Voltage	
TBQCS	Standard	M	Male	06	600A	LWMS	Large Wall Mount Mild Steel	208	208Y/120V
		F	Female	08	800A	LWSS	Large Wall Mount Stainless Steel	240	240/120V
								480	480Y/277V
								600	600Y/347V

Standard Components	
A	Trapped Cable Door
B	Remote Start/Stop Terminals & GFCI 20 Amp Receptacle
C	Additional Accessory Mounting
D	Mounting Hole Pattern – (4X) 0.50" dia. (30.50" x 40.50")
E	(5X) Copper Bus Bar, Tin Plated, (2) mounting hole 0.50" dia.
F	Series 16, 400 Amp, 600 VAC, Single Pole Camlock Receptacle
G	Key Lock Handle (X2)
H	Quarter Turn Twist Lock Handle (Non-Locking)

Voltage	Ground	Neutral	L1	L2	L3	# of Rows
208Y/120	GRN	WHT	BLK	RED	BLU	x2
240/120	GRN	WHT	BLK	RED	BLU	x2
480Y/277	GRN	WHT	BRN	ORG	YEL	x2
600/347	GRN	WHT	BLK	RED	BLU	x2



Revised 2025.11