


ADD-A-PHASE® POWER CONVERTER

TYPE	TYPICAL APPLICATIONS (SINGLE MOTOR ONLY)
S	PUMP, COMPRESSOR, FAN, BLOWER
SAC	AIR CONDITIONING, REFRIGERATION COMPRESSOR
SUB	SUBMERSIBLE WATER PUMPS
HE-AA	HYDRAULIC PASSENGER ELEVATORS
AA-HE	HYDRAULIC COMPACTORS, BALERS
HD	SIREN, VALVE ACTUATOR

DIMENSIONS OF NEMA 3R ENCLOSURES

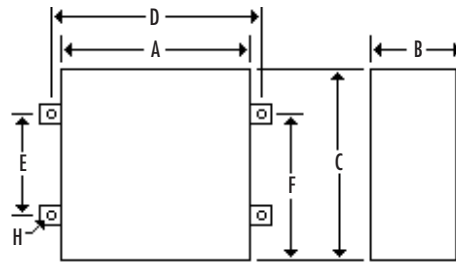


ENCLOSURE	A	B	C	D	E	F	H
603	17	11	16-1/8	18	10	13	1/2
107	22-1/4	12-7/8	18-5/8	26	11-1/2	15	9/16
115	25-1/2	14	21-1/4	29	14	17-1/2	9/16
130	28-3/4	16-1/2	26-3/4	32-1/4	17-5/8	22-1/8	9/16

1Ø FULL LOAD AMP RATING			
HP	INPUT VOLTAGE		STARTING CURRENT
	240V	480V	
1	5	3	APPROXIMATELY 300% OF FULL LOAD RUNNING AMPS
1.5	7	4	
2	9	6	
3	13	7	
5	20	10	
7.5	30	15	
10	40	20	
15	60	30	
20	80	40	
25	95	48	
30	115	58	
40	150	75	
50	185	93	
60	220	110	
75	280	140	

FOR TYPE SAC & SUB, USE THE NEXT LARGER HP RATING

PADMOUNT

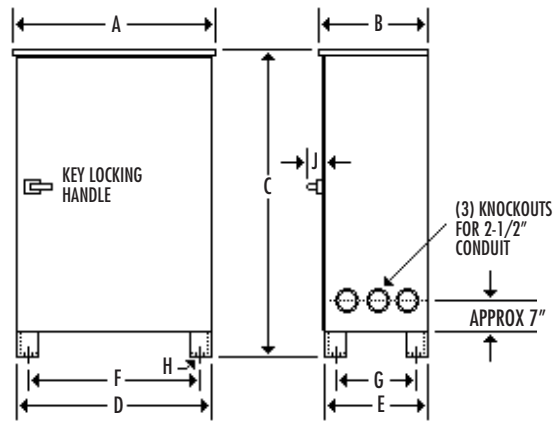

ENCLOSURE	A	B	C	D	E	F	G	H	J
150	32	22-7/8	40-7/8	30	21	27-1/2	18-1/2	1/2	3-1/4
175	38	28-7/8	40-7/8	36	27	33-1/2	24-1/2	1/2	3-1/4

OTHER MODELS AVAILABLE.
CONTACT RONK FOR
MORE INFORMATION

ENCLOSURE SIZE & APPROXIMATE SHIPPING WEIGHTS (LBS)

ENCLOSURE	HP	2S	2SAC 2SUB	2HE-AA 2AA-HE	2HD	3S	3SAC 3SUB	3HE-AA 3AA-HE	3HD	4S	4SAC 4SUB	4HE-AA 4AA-HE	4HD
603	1	52	60		55	68	73		78	56	60		61
	1.5	60	63		85	73	81		98	60	63		85
	2	63	74		95	81	121		111	63	115		95
	3	74	140		112	121	160		158	115	142		110
107	5	140	165		145	160	190		180	142	165		145
	7.5	165	205		178	190	240		205	165	205		175
115	10	205	242	225	210	240	285	269	250	205	245	210	215
	15	242	310	275	280	285	380	319	315	245	320	250	285
130	20	310	350	328	320	380	400	373	390	320	360	330	330
	25	350	390	368	360	400	450	410	410	360	420	370	370
	30	390	555	400	497	450	635	545	550	420	574	425	525
150	40	555	626	565	565	635	720	640	645	574	660	585	590
	50	626	680			720	867			660	755		
175	60	680	700			867	975			755	892		
	75	700				975				892	1,115		
	100									1,115	1,125		
	125									1,125			

Sales Information: 1-800-221-7665



Service & Support: 1-217-563-8333

106 E. State Street • Nokomis, Illinois 62075 www.ronkelectrical.com Phone: 217-563-8333 • Fax: 217-563-8336