

RONK METERING CENTER

METER SOCKET COMBO UNIT (MSB)



Overhead Feed
MSB Units



Underground Feed MSB
Units with Trough



Hub Hole - Overhead
Units Only

Ronk's MSB 200A Meter Socket series allows the flexibility to specify your current limiting device. Meter sockets are available with a lever bypass in the 4 jaw or 5 jaw configuration. Loads are connected through a 3 hole lug configuration or at the breaker. It is available in a NEMA 3R lightweight Aluminum enclosure in either overhead or underground configurations.



- Before purchasing: consult your local utility for approval.
- Contact Ronk for specific utility approved part number.

FEATURES AND BENEFITS

- NEMA 3R aluminum enclosure is lightweight, outdoor rated and corrosion resistant
- 4 or 5 jaw lever bypass meter socket
- Separate cover for Meter Section to meet NEC 230.62
- Assembled in the USA

Meter Socket Breaker Combo Unit				
Part Number	Meter Socket	Breaker	Knockout Pattern	Feed Type
MSB2100Lx (x=C, D, E, G)	200A	100A	(1) 1.5-2", (2) 2-2.5", (1) 0.5"	Overhead*
MSB2100Lx-UG (x=C, D, E, G)	200A	100A	(1) 1.5-2", (2) 2.5-3", (1) 0.5", (1) 2-2.5"	Underground
MSB2125Lx (x=C, D, E, G)	200A	125A	(1) 1.5-2", (2) 2-2.5", (1) 0.5"	Overhead*
MSB2125Lx-UG (x=C, D, E, G)	200A	125A	(1) 1.5-2", (2) 2.5-3", (1) 0.5", (1) 2-2.5"	Underground
MSB2150Lx (x=C, D, E, G)	200A	150A	(1) 1.5-2", (2) 2-2.5", (1) 0.5"	Overhead*
MSB2150Lx-UG (x=C, D, E, G)	200A	150A	(1) 1.5-2", (2) 2.5-3", (1) 0.5", (1) 2-2.5"	Underground
MSB2175Lx (x=C, D, E, G)	200A	175A	(1) 1.5-2", (2) 2-2.5", (1) 0.5"	Overhead*
MSB2175Lx-UG (x=C, D, E, G)	200A	175A	(1) 1.5-2", (2) 2.5-3", (1) 0.5", (1) 2-2.5"	Underground

* Overhead Feed Enclosure comes with Hub Hole


Note: For CECHA Territory, add "1" to the item code (Ex: MSB200HA1 or MSB200HA1-UG); Horn Bypass approved only

Note: For MEG Utility Territory, add "x4" to item code (Ex: MSB200Lx4 (x= C, D, E, G); Lever Bypass approved only

x = C, D, E, G		
(x)	Bypass Type	Load Lug
C	4 Jaw Lever Bypass	3-Hole Load Lug
D	5 Jaw Lever Bypass	Factory Breaker Terminal Load Lug
E	5 Jaw Lever Bypass	3-Hole Load Lug
G	4 Jaw Lever Bypass	Factory Breaker Terminal Load Lug


DIMENSIONS OF KNOCKOUTS (IN INCHES)

Figure 1, MSB Meter Socket Overhead

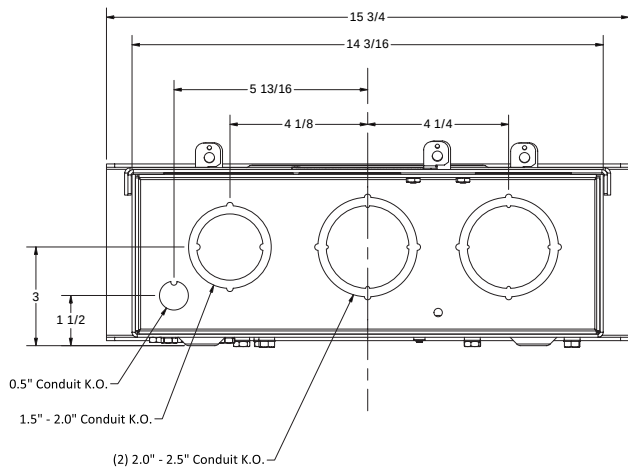


DIMENSIONS OF NEMA 3R ENCLOSURE (IN INCHES)

Figure 2, MSB Meter Socket Overhead

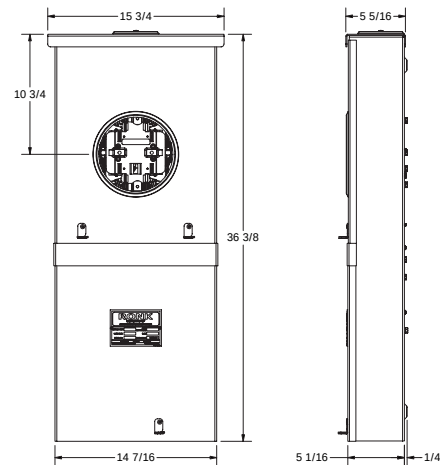

DIMENSIONS OF KNOCKOUTS (IN INCHES)

Figure 3, MSB Meter Socket Underground

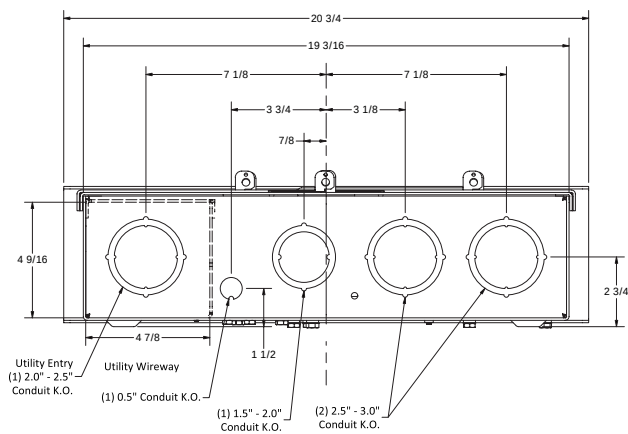

DIMENSIONS OF NEMA 3R ENCLOSURE (IN INCHES)

Figure 4, MSB Meter Socket Underground

