

METER-RITE® DOUBLE-THROW SWITCHES

POLE TOP


MANUAL, NON-FUSED - QUICK-BREAK/QUICK-MAKE SWITCHES

The METER-RITE® switches listed below are rated 100% capacity, continuous duty.

Switch	Part Number	Approx. Weight (lbs)	DPDT - Double Pole - Double Throw TPDT - Triple Pole - Double Throw
Single Phase (240 Vac) UL Listed	9205	35	DPDT with 200A main contacts, 200A aux contacts
	9406	35	DPDT with 400A main contacts, 400A aux contacts
Three Phase (240 Vac) UL Listed	9805	44	TPDT with 200A main contacts, 200A aux contacts
	9806	44	TPDT with 400A main contacts, 400A aux contacts
Single Phase (240 Vac) Non-UL	9221	36	DPDT with 200A main contacts, 200A aux contacts with 200:5A metering CT
	9422	39	DPDT with 400 amp main contacts, 400 amp aux contacts with 400:5 amp metering CT
Three Phase (240 Vac) Non-UL	9870	56	TPDT with 200A main contacts, 200A aux contacts with (3) 200:5A metering CTs
	9871	61	TPDT with 400A main contacts, 400A aux contacts with (3) 200:5A metering CTs
Single Phase (600 Vac) Non-UL	R-8208-6	184	DPDT with 800A main contacts, 600A aux contacts
Three Phase (600 Vac) Non-UL	9800-6	44	TPDT with 200A main contacts, 200A aux contacts
	9808-6	41	TPDT with 400A main contacts, 400A aux contacts
	R-8808-6	197	TPDT with 800A main contacts, 600A aux contacts

Caution: Do not switch between sources with motor load operating.


DIMENSIONS OF NEMA 3R ENCLOSURE (IN INCHES)

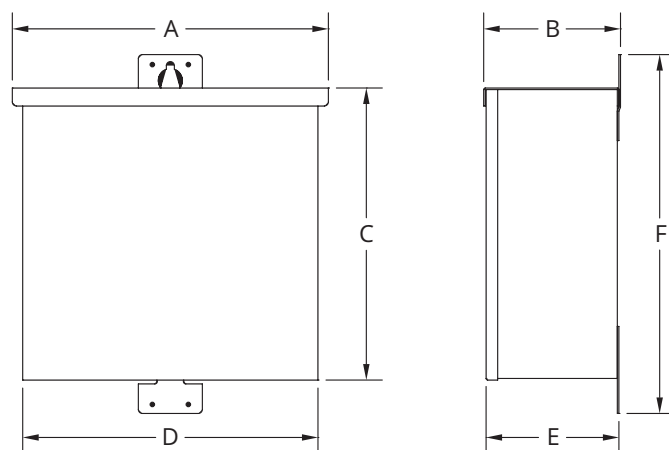

Part Number	Wire Range	A	B	C	D	E	F
9205	E	19-3/4	8-9/16	18-1/4	18-1/2	8-5/16	23
9221	E	19-3/4	8-9/16	18-1/4	18-1/2	8-5/16	23
9406	G	19-3/4	8-9/16	18-1/4	18-1/2	8-5/16	23
9422	G	19-3/4	8-9/16	18-1/4	18-1/2	8-5/16	23
9805	F	25-3/4	8-9/16	18-1/4	24-1/2	8-5/16	23
9806	H	25-3/4	8-9/16	18-1/4	24-1/2	8-5/16	23
9800-6	F	25-3/4	8-9/16	18-1/4	24-1/2	8-5/16	23
9808-6	H	25-3/4	8-9/16	18-1/4	24-1/2	8-5/16	23
9870	F	25-3/4	8-9/16	26-1/4	24-1/2	8-5/16	31
9871	H	25-3/4	8-9/16	26-1/4	24-1/2	8-5/16	31

Wire Range	Line/Auxiliary Lugs	Load Lugs
E & F	250 MCM - #6 CU-AL (1-Hole Lug)	250 MCM - #6 CU-AL (1-Hole Lug)
G & H	(2) 250 MCM - 1/0 OR (1) 600 MCM - #4 CU-AL (1-Hole Lug)	(2) 250 MCM - 1/0 OR (1) 600 MCM - #4 CU-AL (1-Hole Lug)

800 AMP

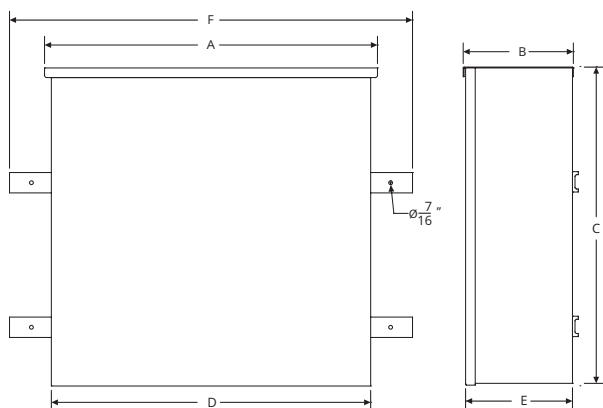

Part Number R-8208-6, R-8808-6

A	B	C	D	E	F
38	12-1/2	36-1/4	36-1/2	12-1/4	46

Wire Range

Line Lugs	Load Lugs	Auxiliary Lugs
750 MCM - 500 MCM CU-AL (2-Hole Lug)	600 MCM - #2 CU-AL (3-Hole Lug)	350 MCM - #4 CU-AL (2-Hole Lug)

Revised 2023.08

RONK

Sales: 1-800-221-7665 • Service & Support: 1-217-563-8333

PO Box 160, 106 E State Street, Nokomis, IL 62075-0160 • sales@ronkelectrical.com • www.ronkelectrical.com