

RONK METERING CENTER

MSB200 METER SOCKET COMBO UNIT



Overhead Feed
MSB Units



Underground Feed MSB
Units with Trough



Hub Hole - Overhead
Units Only

Ronk's MSB200 series allows the flexibility to specify your current limiting device. Meter sockets are available with a Horn bypass in the 4 jaw, and either horn or lever in the 5 jaw. Loads are connected through a 3 hole lug configuration or at the breaker. It is available in a NEMA 3R lightweight Aluminum enclosure in either overhead or underground configurations.



- Before purchasing: consult your local utility for approval.
- Contact Ronk for specific utility approved part number.

FEATURES AND BENEFITS

- NEMA 3R aluminum enclosure is lightweight, outdoor rated and corrosion resistant
- Horn bypass in the 4 jaw, and either horn or lever in the 5 jaw
- 200 Amp molded case circuit breaker
- Separate cover for Meter Section to meet NEC 230.62
- Assembled in the USA

MSB200						
Part Number	Amperage Rating	Breaker	Bypass Type	Load Lug	Knockout Pattern	Feed Type
MSB200HA	200	25k	Horn Bypass	3-Hole Load Lug	(1) 1.5-2", (2) 2-2.5", (1) 0.5"	Overhead*
MSB200HA-UG	200	25k	Horn Bypass	3-Hole Load Lug	(1) 1.5-2", (2) 2.5-3", (1) 0.5", (1) 2-2.5"	Underground
MSB200HF	200	25k	Horn Bypass	Factory Breaker Terminal Load Lug	(1) 1.5-2", (2) 2-2.5", (1) 0.5"	Overhead*
MSB200HF-UG	200	25k	Horn Bypass	Factory Breaker Terminal Load Lug	(1) 1.5-2", (2) 2.5-3", (1) 0.5", (1) 2-2.5"	Underground
MSB200HB	200	25k	Horn Bypass	3-Hole Load Lug	(3) 2-2.5"	Overhead*
MSB200LC	200	25k	4 Jaw Lever Bypass	3-Hole Load Lug	(1) 1.5-2", (2) 2-2.5", (1) 0.5"	Overhead*
MSB200LC-UG	200	25k	4 Jaw Lever Bypass	3-Hole Load Lug	(1) 1.5-2", (2) 2.5-3", (1) 0.5", (1) 2-2.5"	Underground
MSB200LD	200	25k	5 Jaw Lever Bypass	Factory Breaker Terminal Load Lug	(1) 1.5-2", (2) 2-2.5", (1) 0.5"	Overhead*
MSB200LD-UG	200	25k	5 Jaw Lever Bypass	Factory Breaker Terminal Load Lug	(1) 1.5-2", (2) 2.5-3", (1) 0.5", (1) 2-2.5"	Underground
MSB200LE	200	25k	5 Jaw Lever Bypass	3-Hole Load Lug	(1) 1.5-2", (2) 2-2.5", (1) 0.5"	Overhead*
MSB200LE-UG	200	25k	5 Jaw Lever Bypass	3-Hole Load Lug	(1) 1.5-2", (2) 2.5-3", (1) 0.5", (1) 2-2.5"	Underground
MSB200LG	200	25k	4 Jaw Lever Bypass	Factory Breaker Terminal Load Lug	(1) 1.5-2", (2) 2-2.5", (1) 0.5"	Overhead*
MSB200LG-UG	200	25k	4 Jaw Lever Bypass	Factory Breaker Terminal Load Lug	(1) 1.5-2", (2) 2.5-3", (1) 0.5", (1) 2-2.5"	Underground

* Overhead Feed Enclosure comes with Hub Hole


Note: For CECHA Territory, add "1" to the item code (Ex: MSB200HA1 or MSB200HA1-UG); Horn Bypass approved only

Note: For MEG Utility Territory, add "x4" to item code (Ex: MSB200Lx4 (x= C, D, E, G); Lever Bypass approved only




DIMENSIONS OF KNOCKOUTS (IN INCHES)

Figure 1, MSB200L Overhead

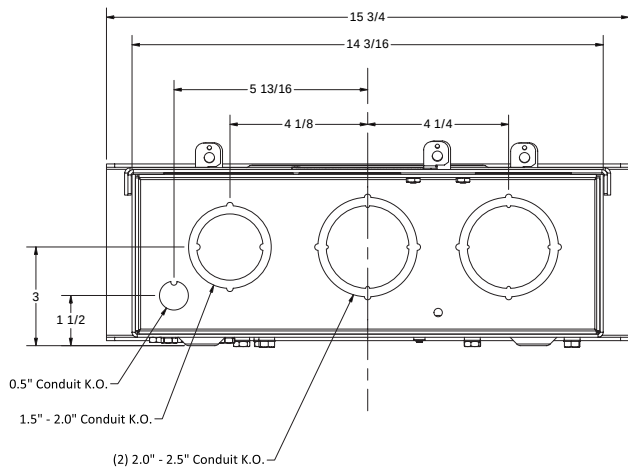


DIMENSIONS OF NEMA 3R ENCLOSURE (IN INCHES)

Figure 2, MSB200L Overhead

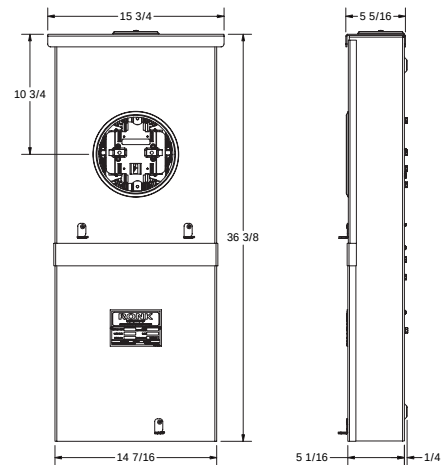

DIMENSIONS OF KNOCKOUTS (IN INCHES)

Figure 3, MSB200L & MSB200H Underground

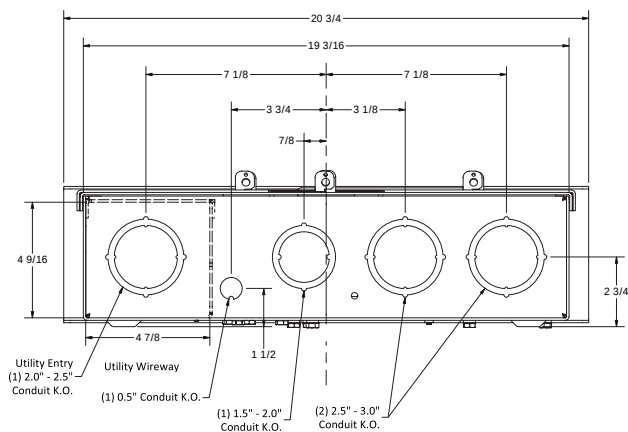

DIMENSIONS OF NEMA 3R ENCLOSURE (IN INCHES)

Figure 4, MSB200L & MSB200H Underground

